

A rack and pinion gate consists of a gate frame, blade, rack(s), pinion gear(s), pinion shaft, shaft bearings and a manual or powered shaft drive. Some larger manual drives may incorporate v-belts and/or gear boxes for mechanical advantage. Most powered rack and pinion gates will incorporate some type of mechanical advantage between the driver and pinion shaft.



Rack and pinion gates are used generally as maintenance gates ahead of feeders and other equipment. Due to their simple construction, rack and pinion gates can be relied on to operate after months of inactivity. This is especially important in powerhouse and industrial applications.

Due to their limited actuating speed, rack and pinion gates are rarely used to regulate flow into a process or onto a conveyor; however, they are sometimes used to discharge small hoppers that always discharge completely. For example, a rock bin that has a maximum capacity of one truckload may use a rack and pinion gate to shut off flow when a truck is not being loaded.

Rack and pinion gates larger than 1500mm are seldom economical due to high operating forces and the resulting expensive drive hardware.

Applications

Some typical applications include:

- 600mm to 1200mm rack and pinion gates can be used to load trucks from small coal or rock bins.
- As maintenance gates ahead of coal feeders, pulverizers, crushers, and alternate process systems.
- Most flow control applications not requiring high blade speed.
- Emergency shut off gates to allow maintenance of downstream equipment without unloading the material in storage.

Actuators

The actuators available for use on rack and pinion gates are:

- Hand wheel, chain fall, or ratchet
- Hand wheel, chain fall or ratchet attached to a gearbox
- Electric motor attached to a gearbox
- Hydraulic or air motor attached to a gearbox
- Commercially available rotary actuators

Seals


Seals are available for a wide range of applications including:

- To prevent or reduce escaping dust
- To isolate the gate from vibration.
- To prevent the transfer of forces between the gate and other structure or equipment.
- To prevent the escape of water or to direct the water to a collection point.

Position Indication

Especially for totally sealed gates, it is important to have a method of determining the position of the gate blade. For some gates it is necessary to determine when they are closed, for others when they are open and for others when they are both open and closed. Some of the devices available to determine the gate blade position are:

- A limit switch can be used to detect the closed, open or any pre set intermediate position.
- A proximity switch can be used to detect the closed, open or any pre set intermediate position.
- A sensor can be used to continually detect the gate blade position.
- For visual indication, a rod attached to the gate blade can be extended outside the gate through a grommet to indicate the blade position.
- Integral position indication is available from actuator manufacturers to indicate the gate blade position.

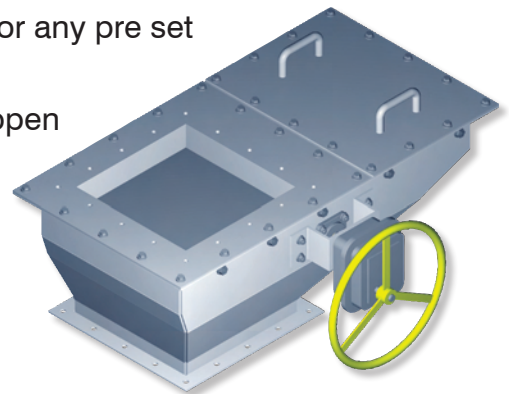

Construction Materials

Rack and pinion gates can be fabricated from or equipped with a wide range of construction materials depending on the characteristics of the bulk material being handled. Some examples of construction materials for different applications are:

- Carbon Steel with abrasion resistant liners to protect the blade supports can be used for most applications
- Polished stainless steel blade liners can be used to reduce the friction between the bulk material and the gate blade thereby reducing the force required to open the blade.
- Stainless steel can be used in all areas in contact with acidic material to prevent corrosion. In some instances it may be necessary to fabricate the entire gate from stainless steel.
- Blade supports can be commercially available needle bearing rollers, fabricated stainless steel rollers or low friction plastic slide bearings.
- The shafting, racks, and pinion gears can be manufactured from a wide range of alloys to suite the application.



HALLEY & MELLOWES AUSTRALASIA NSW

Wyong - HMA Group Head Office

10 Hereford Street, Berkeley Vale NSW 2261
PO Box 5010 Chittaway NSW 2261
Tel: +61 (0)2 4389 6191
Fax: +61 (0)2 4389 6199
Email: info@hmagroup.com.au

Sydney

13 Sirius Road, Lane Cove NSW 2066
Tel: +61 (0)2 9428 7300
Fax: +61 (0)2 9428 7399
Email: sydney@hmagroup.com.au

Singleton

21 Magpie St, McDougall's Hill, NSW 2330
Tel: +61 (0)2 6571 8200
Fax: +61 (0)2 6571 8299
Email: singleton@hmagroup.com.au

QLD

Brisbane

Building 107, unit 3B, 2-6 Leonardo Drive,
Hamilton Central, QLD 4007
PO Box 999, Hamilton Central, QLD 4007
Tel: +61 (0)7 3859 6800
Fax: +61 (0)7 3859 6869
Email: brisbane@hmagroup.com.au

Mackay

22-30 Southgate Drive,
Southgate Industrial Park, Paget QLD 4740
PO Box 6221, Mackay Mail Centre QLD 4741
Tel: +61 (0)7 4998 6900
Fax: +61 (0)7 4998 6999
Email: mackay@hmagroup.com.au

Gladstone

9 Neil St, Gladstone QLD 4680
PO Box 1731, Gladstone QLD 4680
Tel: +61 (0)7 4973 5500
Fax: +61 (0)7 4973 5599
Email: gladstone@hmagroup.com.au

WA

Perth

119 Dowd Street, Welshpool WA 6106
Tel: +61 (0)8 6254 9500
Fax: +61 (0)8 6254 9599
Email: perth@hmagroup.com.au

VIC

Melbourne

11/97 Bayfield Road East, Bayswater VIC 3153
Tel: +61 (0)3 8720 6700
Fax: +61 (0)3 8720 6799
Email: melbourne@hmagroup.com.au

Morwell

8 Jones Road, Morwell VIC 3840
Tel: +61 (0)3 5136 8400
Fax: +61 (0)3 5136 8499
Email: morwell@hmagroup.com.au

NT

Darwin

4/69 Aralia St, Nightcliff, NT 0810.
Tel: +61 (0)8 8948 5122
Mobile: +61 (0) 437 460 052
Fax: +61 (0)8 6254 9599
Email: darwin@hmagroup.com.au

NEW ZEALAND

Hamilton

Unit 9, 9 Karewa Place, Pukete, Hamilton NZ 3200
PO Box 10102, Te Rapa Hamilton NZ 3241
Tel: +64 (0)7 850 2610
Fax: +64 (0)7 847 1883
Email: hamilton@hmagroup.co.nz

Dunedin

Mobile: +64 (0) 275 116 694
Email: dunedin@hmagroup.co.nz

INDONESIA

Jakarta

Jl. Adhyaksa Raya Blok W No.11
Kel. Lebak Bulus Kec. Cilandak
Jakarta Selatan 12440
Indonesia
Phone number: +62 21 29124898
Fax: +62 21 7512211
Email: jakarta@hmagrp.com

SOUTH AFRICA

Johannesburg

Quadrum Office Park Building 4
50 Constantia Boulevard, Constantia Kloof
Johannesburg 1709, South Africa
Tel: +27 115 348 523
Fax: +27 115 348 401
Email: johannesburg@hmagrp.com

Halley & Mellowes Australasia Group of Companies

