

CASCADE COIL MESH & HOOK INSTALLATION MANUAL

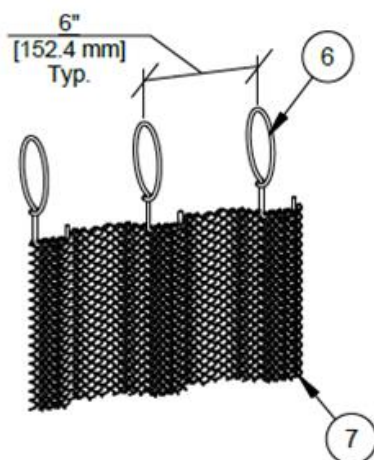


Figure 4a
Safety Hook Installation on Mesh

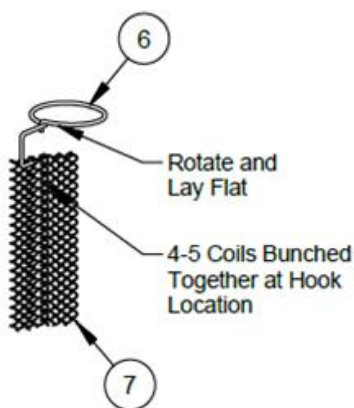


Figure 4b

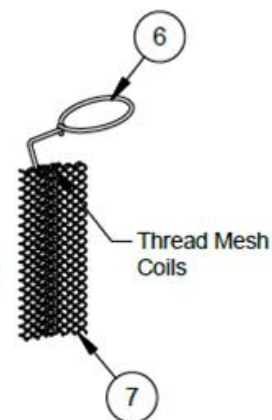


Figure 4c

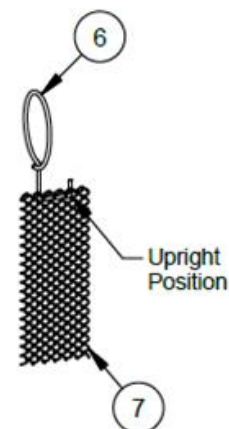


Figure 4d

The GuardianCoil Mesh requires the Industrial Safety Hooks (6) to be threaded through the fabric at 6" on center [152.4 mm]. (Fig. 4a)

Step 1: Bunch 4-5 mesh coils together at the Hook location.

Step 2: Position the Hook (6) horizontal and rotate it towards the Mesh (7). (Fig. 4b)

Step 3: Push and twist the Hook (6) through the first row of mesh diamonds. (Fig. 4b)

Step 4: Continue to thread the Hook (6) through 4-5 bunched Coils (7). (Fig. 4c)

Step 5: Return the Hook (6) to its upright position. (Fig. 4d)

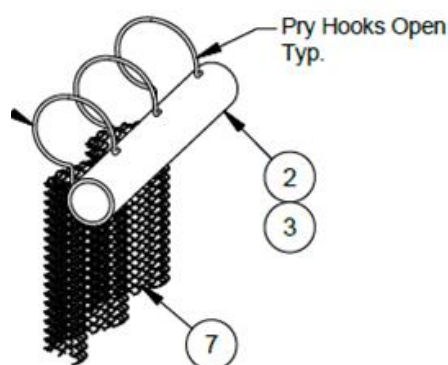


Figure 5a
Mesh Curtain Installation

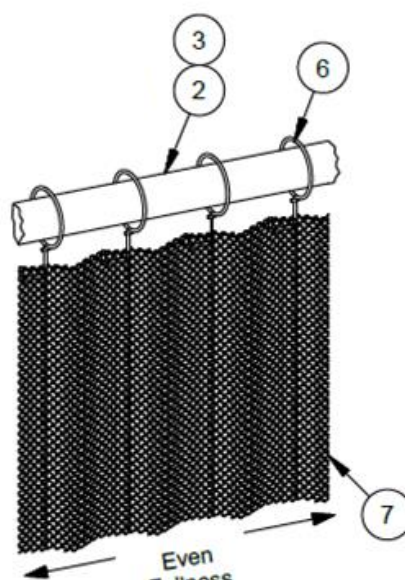


Figure 5b

Install the Mesh Curtain (7) onto the Support Assembly (1) by individually forcing the unsnapped Safety Hooks (6) over the Pipe Supports (2)(3) then spreading the Mesh (7) evenly across the opening.

Step 1: Unsnap all the Safety Hooks (6).

Step 2: Pry the Hooks (6) open wide enough to fit over the Support Pipe Assembly (1) and force them on. (Fig. 5a)

Step 3: Re-snap all the Safety Hooks (6).

Step 4: Adjust the Mesh Curtain (7) fullness evenly across the opening. (Fig. 5b)